



## Submittal Data Sheet

3.0-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ36TAVJUD

### FEATURES

- Capable of upflow, horizontal-right, horizontal-left, and downflow installation. Downflow installation requires the use of a field installed downflow accessory kit.
- Variable speed ECM motor produces nominal CFM up to 0.9" external static pressure.
- Improved auxiliary heat logic
- Designed with less than 2% air leakage when tested in accordance with ASHRAE 193.
- All-aluminum coil
- Precise refrigerant modulation from a 2000 pulse electronic expansion valve
- Cool, Dry, Auto, Heat, and Fan operation modes
- Auto Fan Speed automatically adjusts fan speed in relation to space temperature and set point
- Factory mounted disconnect switch
- Configurable Dry mode
- Standard Limited Warranty: 10-year warranty on compressor and all parts

### BENEFITS

- Optimized fan speed from Auto Fan Speed logic
- Reduced auxiliary heat dead band
- Configurable electric heat on/off temperature settings
- Compact foot print fits tight spaces





## Submittal Data Sheet

3.0-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ36TAVJUD

### PERFORMANCE

Indoor Unit Model No.	FXTQ36TAVJUD	Indoor Unit Name:	3.0-Ton Multi Position Air Handling Unit (w/ disconnect)
Type:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	36,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	24,400	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.440	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	40,000		
Heating Input Power (kW):	0.44		

### INDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1,050/900/750
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	6.50	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	45 x 17.5 x 21	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure (H) (dBA):	52
Net Weight (lb):	140	Sound Power Level (dBA):	60
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.90 / 0.90

**Submittal Data Sheet**

3.0-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ36TAVJUD

**DIMENSIONAL DRAWING**

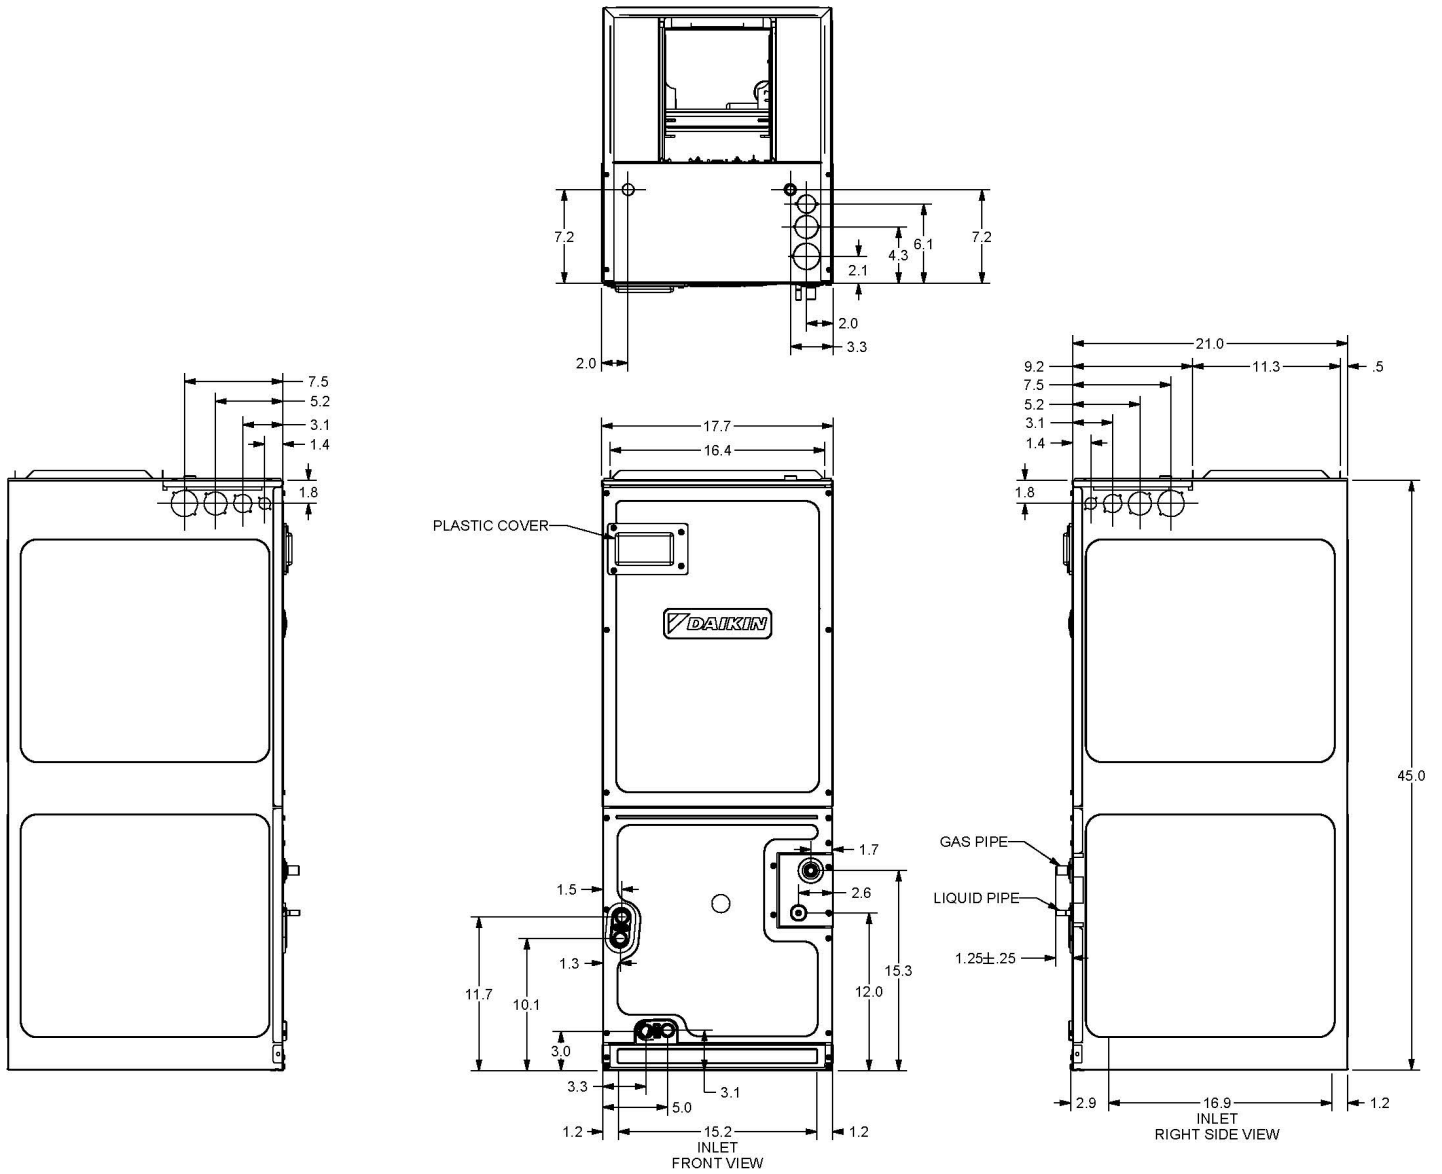

FXTQ09/12/18/24/30/36 TAVJU